


PLASKOLITE

**POLYGAL®
MULTIWALL POLYCARBONATE
SHEETS AND CONNECTION SYSTEMS**



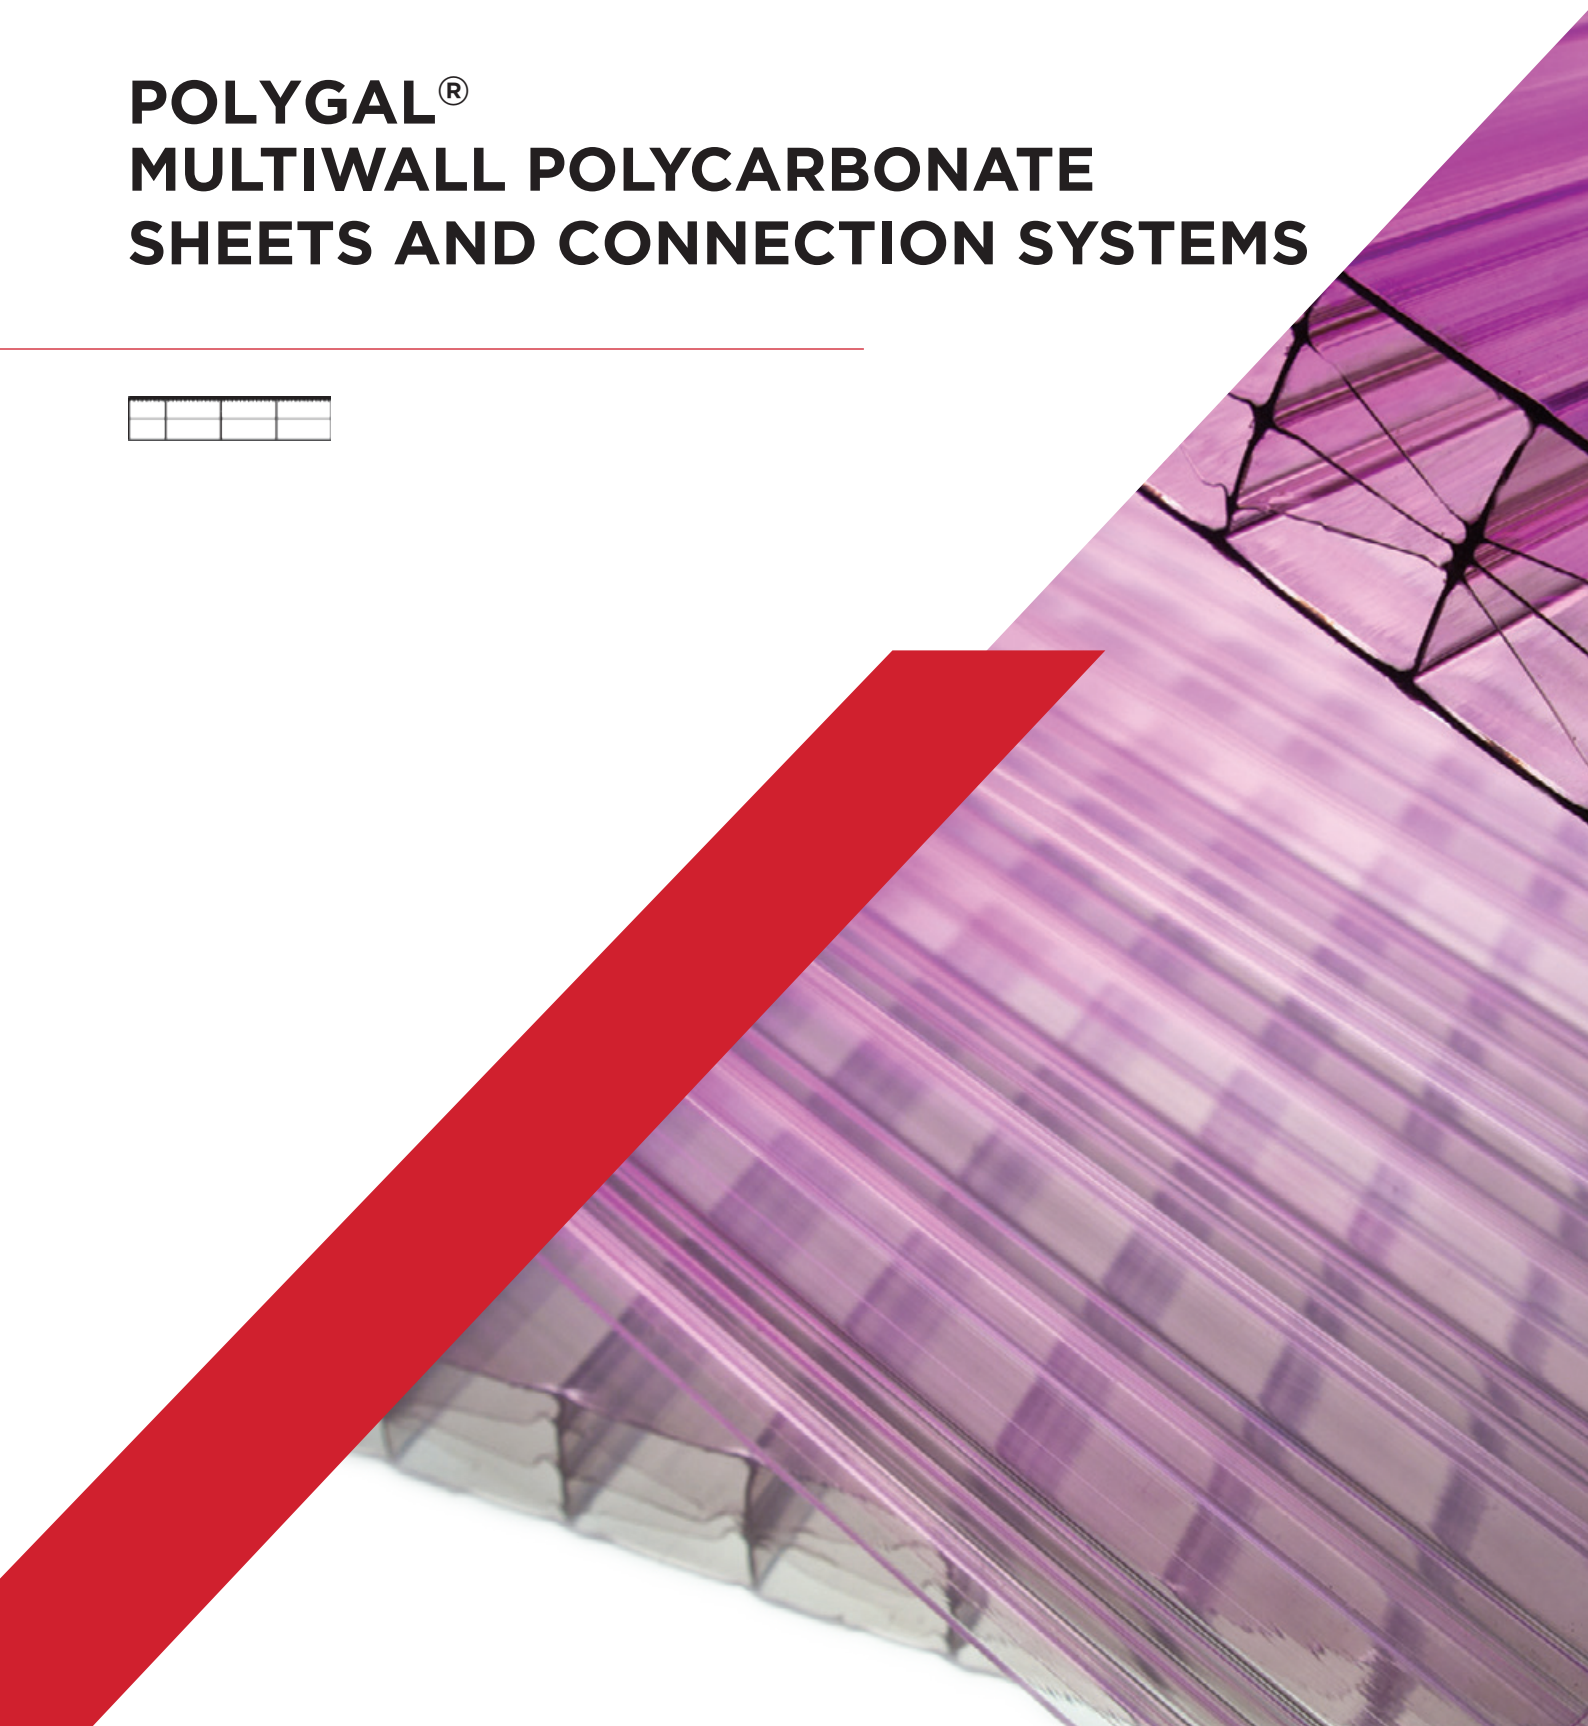

Polycarbonate | Multi Wall Sheets

THE ART OF LIGHT MANAGEMENT

Great artists know how to work with light. Great architects and designers look for the best materials to bring the light into each space so as to create the right atmosphere. PLASKOLITE produces a range of flexible multi wall thermoplastic sheets that are ideal for many roofing, glazing, skylights, signage and interior design projects. They enable you to manage the available light and provide insulation and UV-protection, as well as adding texture and color to your project.

Our multi wall sheets are constructed from multiple layers of polycarbonate for maximum strength, with an internal cellular structure that makes them light and flexible.

Features and Benefits

- Excellent insulation
- Controlled daylight transmission
- Virtually unbreakable
- Flexible and easy to install
- Flame retardant
- Lightweight
- UV-blocking
- Environmentally friendly



A



B



C




D

- A Agriculture** - maximizing natural light and thermo- insulation all year round.
- B Architecture** - lightweight roofing with selective layers for light management.
- C Decorative** - creative design feature with endless color and illumination options.
- D Signage** - lightweight material with optimum light diffusion for lightbox signs.

DOUBLE AND TRIPLE LAYERED SHEETS


Double and triple-layered PLASKOLITE Group sheets are manufactured in various colors and degrees of transparency.

The sheets is designed for use in most conventional roofing and glazing applications.

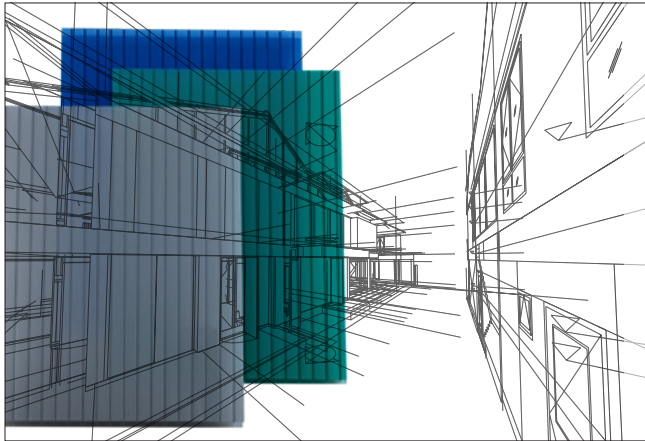


Thermogal

Thermogal's unique interior X-brace combines extra strength and rigidity with outstanding insulation. Ideal for low-pitched roofs and for glazing closed structures with large-span openings, Thermogal is available in different thicknesses, widths, and colors.

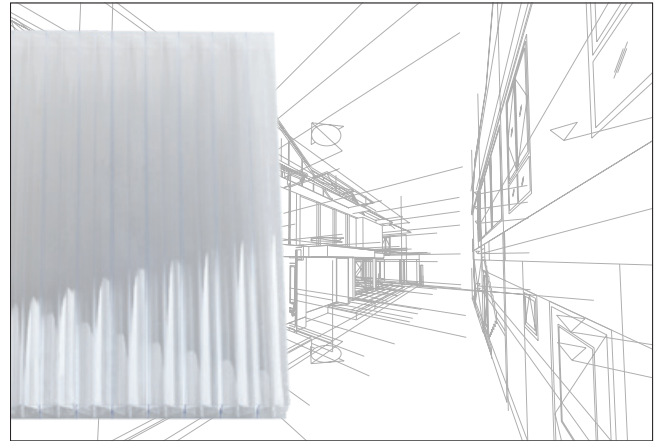


Selectogal

An exclusive PLASKOLITE Group patent lets Selectogal (RFX) control the penetration of heat and the transmission of natural daylight into buildings, reducing heating and lighting costs. Selectogal's sophisticated prismatic structure reflects most of the sun's heat in the summer and allows increased penetration of solar heat in the winter.

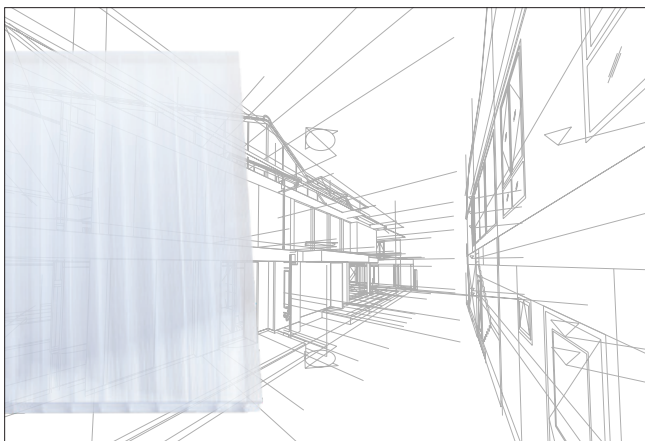





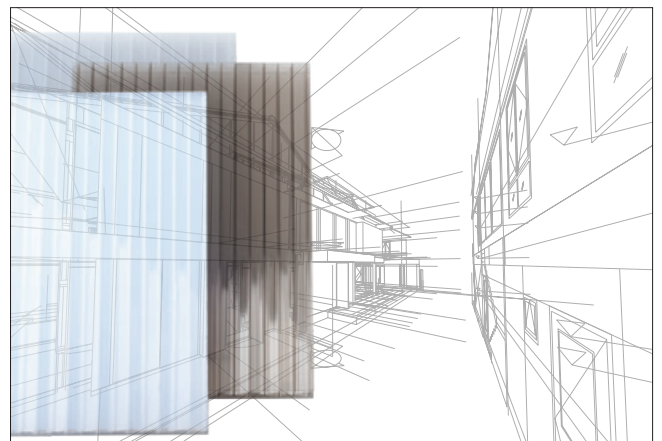





Titan Sky

Titan Sky's internal cross-brace structure gives these sheets twice the strength and rigidity of equivalent standard polycarbonate sheets. Plazit Polygal Group Titan Sky presents an advanced solution that stands up to heavy loads.



MECHANICAL AND THERMAL PROPERTIES

Product	Structure	Thickness (mm)	Weight (g/m ²)	Standard Width (mm)	Minimum Radius for Cold Bending Arches (m)	U-Factor* (W/m ² x °C)	Light Transmission (%)**			
							Bronze	NGL	Clear	Ice
DOUBLE AND TRIPLE LAYERED SHEETS		4	800	980 1050 1200 1220 1250 2100	0.7	3.9	42	-	82	32
		6	1300		1.05	3.6	42	-	80	32
		8	1500		1.4	3.3	42	25	80	32
		10	1700		1.75	3.0	42	25	79	32
		16	2700		2.8	2.3	42	35	72	32
Titan Sky		10	1750	1050 1200 2100	1.75	2.4	42	25	62	32
		16	2500		2.8	2.1	42	25	61	32
Selectogal		16	3000	1050 1200	2.8	2.3	42	32	68	-
Thermogal		20	3000	1200 2100	3.6	1.9	20	20	56	20
		25	3500		4.4	1.7	20	20 (51***)	55	20 (54***)
		32	3800	980 1200	5.6	1.3	15	15 (47***)	50	15
Thermogal Super		32	3800		Not recommended	1.06	-	10	38	-

| * ASTM C177 TNO | ** ASTM D1003 | ***ASTM D1494



Available In Standard Colors	Standard Sheet Length	Thermal Expansion	Service Temp. Range
Clear, Ice, Nonglare (NGL), Blue, Bronze, Gray, Green, Turquoise	3 m, 4 m, 6 m Max. length: in accordance with handling restrictions	2.5 mm/m: Clear, Ice and NGL 4.5 mm/m: dark colors (ΔT=80°C)	-40°C--+120°C for short time service. 25°C to +85°C for prolonged service

CONNECTION PROFILES AND ACCESSORIES

Our interconnecting polycarbonate or aluminum profiles connect multiple multiwall sheets to cover large areas. They add no weight and lie flush with the sheets. They are UV-resistant and provide excellent sealing for roofs and inclined walls, because they do not obstruct light at connection points. Our profiles are available in unlimited lengths, are easy to handle and install, and suit most roofing, curtain wall and cladding applications


RECOMMENDED USES

Our profiles suit most roofing, curtain wall, and cladding applications.

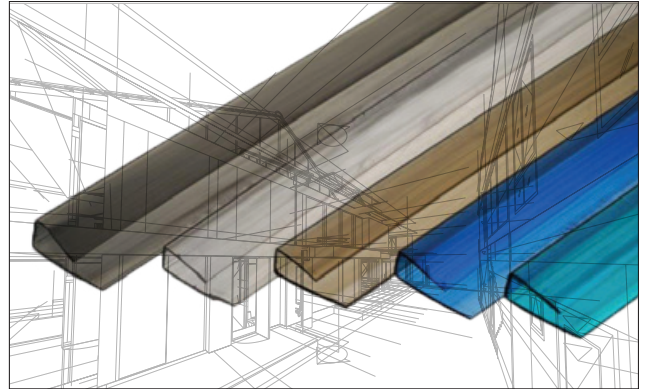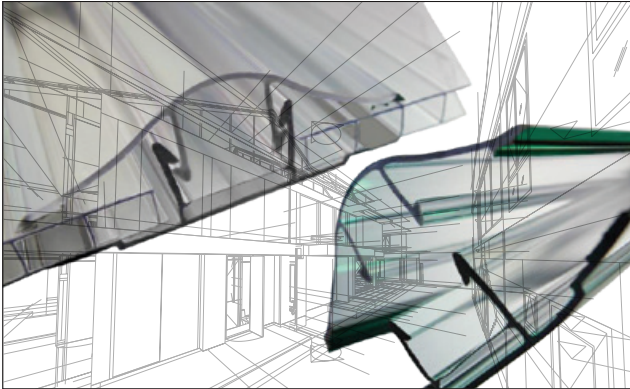


ECP System

Connection system for polycarbonate profiles designed to connect multiwall polycarbonate sheets with thicknesses between 6 mm to 10 mm. Profiles can easily be connected together to form reliable joints. Manufactured in all standard colors, in lengths of 6 m or 12 m.

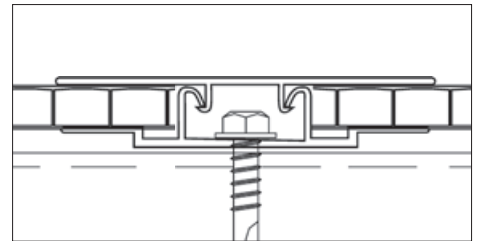


Combined connection System

Combined connection system consisting of an aluminum base and polycarbonate cap profiles. Designed to connect multiwall polycarbonate sheets with a thicknesses between 6 mm to 16 mm. Provides a rigid connection. Manufactured in all standard colors. Length up to 6 m.

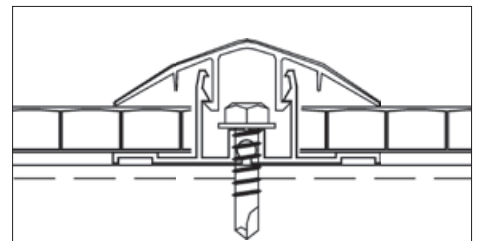


GCP System

Connection system for polycarbonate profiles with integrated co-extruded gaskets, designed to connect multiwall polycarbonate sheets with thicknesses between 6 mm to 10 mm. Provides a very well sealed connection, manufactured in all standard colors, in lengths of 6 m or 12 m.

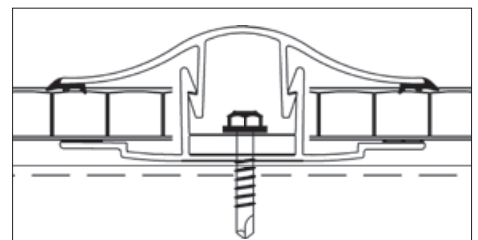


MGL System

Aluminium glazing system designed to connect multiwall polycarbonate sheets with thicknesses between 6 mm to 16 mm. Provides a rigid and sealed connection. Length up to 6 m.

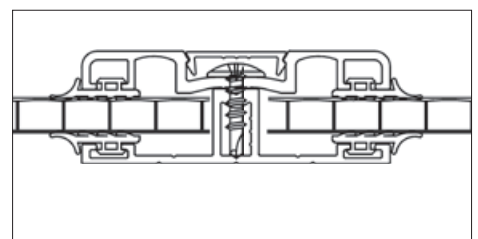


SELECTIVE LAYERS

POLYSHADE

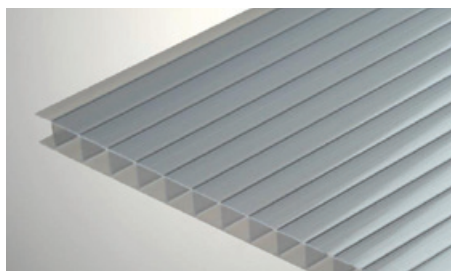


Designed for warm climates, Polylite reflects sunlight to prevent excess heat build up for effective control of solar heat.

PRIMALITE

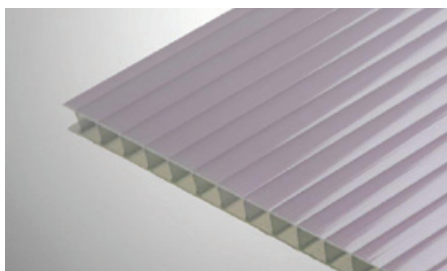


These unique sheets selectively reflect most of the near-IR solar radiation and transmit more visible light. Available in various colors and degrees of transparency.

SILHOUETTE

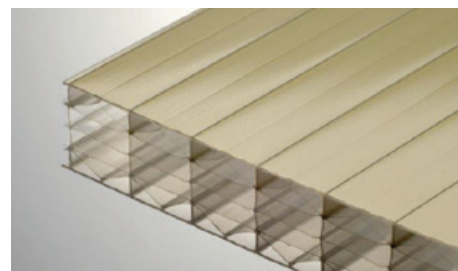


Silhouette, with its sophisticated and lustrous exterior surface, radiates elegance and style and features outstanding reflective qualities and light selectivity. Available in Pearl and Gold.

POLYCOOLITE

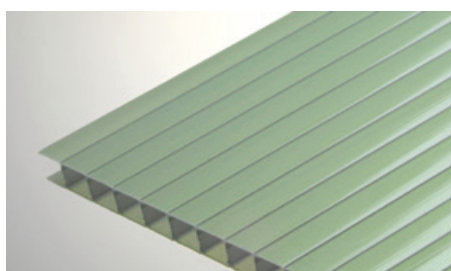


Specifically designed to let in natural light for photosynthesis, Polycoolite blocks harmful UV rays, supplies high blues and reds, and reflects heat from the unused green.

SPRING

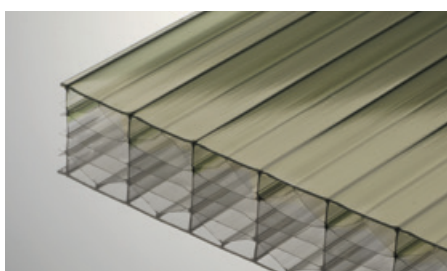

Spring, a transparent sheet with special coextrusion layer on the exterior side (under its UV protective layer), blocks invisible IR solar radiation and heat.

RAINBOW

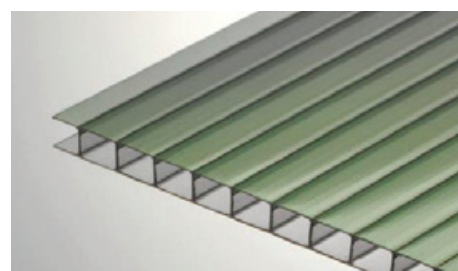

Special optical effects in Rainbow sheets combine with the angle of light to change the sheet color (for example, from red to green) to harmonize with any setting.

Optical Properties Of Selective Layers

Selective Layer	Structure	Thickness (mm)	Light Trans. (%)		Shading Coefficient
			ASTM D1003	ASTM D1494	
Polylite	Double and triple layered sheets	8-10	18	24	0.33
		16	18	20	0.26
Primalite	Double and triple layered sheets	8-10	45	68	0.45
	Double and triple layered sheets	16	32	-	0.31
	Titan Sky	16	18	-	0.27
	Thermogal	25	18	-	0.34
	Thermogal	32	15	-	0.28
Silhouette Pearl	Titan Sky	10	40	-	0.58
	Titan Sky	16	18	-	0.35
	Thermogal	32	10	45	0.39
Silhouette Gold	Double and triple layered sheets	8-10	35	63	0.42
	Titan Sky	16	18	47	0.29
	Thermogal	32	10	43	0.31
Polycoolite	Double and triple layered sheets	8	45	63	0.50
Spring	Double and triple layered sheets	8	70	-	0.61
	Thermogal	32	44	47	0.42
Rainbow	Double and triple layered sheets	8	15	-	0.60

PLASKOLITE

A GLOBAL LEADER IN THE PRODUCTION OF THERMOPLASTIC SHEET FOUNDED IN 1950

Our Mission: to deliver superior thermoplastic sheet, coatings and polymers to the world, through long-lasting customer relationships and hands-on customer service.

MANUFACTURING LOCATIONS



These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2022 **PLASKOLITE, LLC** 140922
POLYGAL® is a registered trademark of PLASKOLITE LLC



PLASKOLITE

400 Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com