


New SW70S swing automations

The 2nd generation of Face products

SW70S

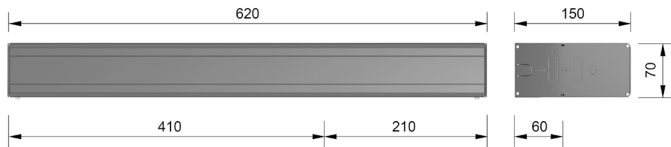

Datasheet

Dimensions	70 x 150 x 620 mm
Max Weight	300 kg x 0,8 m
Cycle Time	2 - 6 s
Service Class	continuos
Power supply	100-240V 50/60 Hz
Rated Power	70 W
Stand-by	0,5 W
Rated Load	40 N
Protection degree	IP20
Temperature range	-15/+50°C
Accessories Output	12 Vdc (1A max)
Locking Device Output	12-24Vdc (1A max)
Settings	keypad or FACE PRC app
Firmware update	Standard USB

SILENT

- Mechanism with one fewer gear reduction stage
- Enhanced smoothness of the gear mechanism
- Material choice for improved acoustics



COMPACT

- Only one spring with an embedded system for final kick/latch
- Slimmer and space-saving: easy fitting into challenging wall ceiling installations
- Equipped with a thinner B9115 brushless motor
- Sliding arm **SW70SA** and articulated arm **SW70AA** re-designed



USER FRIENDLY

- New and easy way of pre-charging the closure spring
- New control unit **CB20** with a simple and seamless layout of the user interface: easy navigation through settings with a new **joystick** and a **1.8" LCD display**
- Protection of the control unit PCBA with a plastic cover

