

■ Technical data

Atrium 3 1,285 gross m²
Showrooms 1st floor 17 rooms with a total area of 2,173 m² gross

Support structure: steel glass construction, in part T-supports.

Room height:

Atrium 3: approx. 9.00 m.

The maximum construction height in the atriums amounts to 6.00 m insofar as the organizer has not set any restrictions. Direct consultation with the MOC Events Department is required. The inside area can accommodate construction widths of up to 10 m. The maximum construction height in the showrooms on the 1st floor is dependent on the ceiling height. The minimum clearance to the ceiling must be 60 cm.

Load-bearing capacity:

Floor loads of max. 500 kg/m².

Trolleys must be equipped with plastic or rubber wheels to prevent damage, metal wheels or casters are prohibited.

Floors:

Atrium 3: tiled marble floors.

Showrooms/Studios: unfinished floor base: cement screed on noise impact/thermal insulation

Floor finish: carpeting, wheelchair compatible, extremely flame retardant

Hallways: carpeting.

Ceilings:

Atrium 3: steel glass construction.

Showrooms/Studios: suspended acoustic ceilings with integrated ventilation and extraction.

Walls:

Walls between the showrooms and hallway walls made of plaster board in support frames.

Doors:

In part steel glass doors, some with fixed glazed section, in part wooden doors with glass panelling, see individual plans for sizes. Doors are kept open automatically. Wedges are not allowed.

Room climate:

Ventilation and extraction system, heating and cooling in the showrooms via individual appliances, cooling: approx. 10° C under outside temperature.

Lighting:

Ceiling-mounted lamps and spots: the illuminance is 300 lux (primarily LED technology)

Noise control:

70 dB(A) (upper limit)

Electrical/Communication/Sanitary installations:

Atrium indoor area: Electrical and communication connections are provided via floor tanks. Sanitary connections are located in the front and rear atrium areas and can be installed subject to consultation.

Showrooms/Studios: The showrooms are equipped with power sockets via which up to 3 kW power can be sourced per wall side. In total, 6 kW power is available per room. Enhanced power supplies can be installed upon consultation with the MOC Department Events.

Telephone and Internet connections are provided via wall jacks following order placement.

Water connections are possible to a restricted extent and after consultation only.

Compressed air:

No compressed air connections are available.

Suspension units:

Atrium: Suspension units in the inside area are possible upon consultation with the MOC Department Events. Suspension points may be installed by accredited service companies of the MOC Event Center Messe München only.

Showrooms: suspending items from ceiling is not possible.

Fire protection:

Atrium: Between the inside area available for stand building and the showrooms, a fire-break of 4 meters in width must be kept clear; this is also the escape/rescue route. Stand covers and canopies are not permitted in the atriums for fire protection reasons.

Showrooms: The emergency exit door facing the aisle leads directly to an escape/rescue route and must be kept clear of fittings and stored goods at all times. The door must be unlocked when persons are present in the room.

Access to Atrium/Loading:

The goods load and self-operated lifts can be used from the delivery zones on the ground floor and 2nd underground floor for delivering heavy and bulky goods. The clearance size to the atrium is 2.10 m wide x 2.00 m high. The delivery areas on the 1st floor are escape routes. Storage of materials in these areas is not permitted, even temporarily.

The load lift must be operated by a technician who has to be ordered for duty during stand set-up and dismantling periods.

Dimensions of load lift:

Height: 2.60 m

Width of cabin interior: 3.00 m

Door width: 2.50 m

Depth: 5.37 m

Load-bearing capacity: 8,000 kg

Dimensions of self-operated elevator:

Height: 2.50 m


Width of cabin interior: 2.00 m

Door width: 1.10 m

Depth: 2.50 m

Load-bearing capacity: 2,400 kg

Atrium 3-1st floor

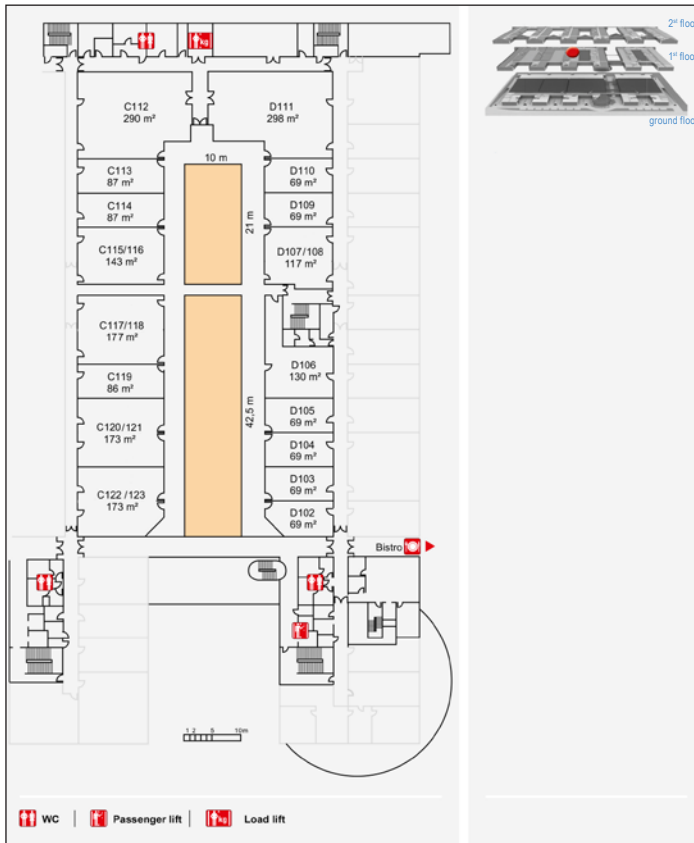

Room	Floor space in m²	Seats	
		Theater style/ Row style	Boardroom style
Room C 112	290	200	160
Room C 113	87	50	40
Room C 114	87	50	40
Room C 115 / 116	143	80	60
Room C 117 / 118	177	100	80
Room C 119	86	50	40
Room C 120 / 121	173	100	80
Room C 122 / 123	173	100	80
Room D 102	69	40	34
Room D 103	69	40	34
Room D 104	69	40	34
Room D 105	69	40	34
Room D 106	130	70	54
Room D 107 / 108	117	70	44
Room D 109	69	40	34
Room D 110	69	40	34
Room D 111	298	200	174
total showrooms: 17	total m²: 2.173		